

Test Report

No. AJHL1604003135FB

Date: APR.14, 2016

Page 1 of 5

ANJI GUYOU FURNITURE CO., LTD

BAISHUIWAN INDUSTRY ZONE, TAINHUANGPING TOWN, ANJI COUNTY, ZHEJIANG, CHINA

The following sample(s) was / were submitted and identified on behalf of the client as:

Sample Description: MATERIALS FOR OFFICE CHAIR

Type/Style: Y-2895A

Supplier: ANJI GUYOU FURNITURE CO., LTD

Manufacturer: ANJI GUYOU FURNITURE CO., LTD

Country of Origin: CHINA

Test Requested:

Flammability in comparison with the requirements of:

1. EN 1021-1:2014 Furniture – Assessment of the ignitability of upholstered furniture Part 1: Ignition source smouldering cigarette.
2. EN 1021-2:2014 Furniture – Assessment of the ignitability of upholstered furniture Part 2: Ignition source match flame equivalent.

Test Results: -- See attached sheet --

Test Period:

Sample Receiving Date : APR.07, 2016

Test Performing Date : APR.07, 2016 TO APR.13, 2016

Signed for and on behalf of
SGS-CSTC Co., Ltd. Anji Branch

Allen Zou
Technical Manager



1. **Test conducted:** EN 1021-1:2014 Furniture – Assessment of the ignitability of upholstered furniture Part 1: Ignition source smouldering cigarette.

Conditioning:

Prior to testing:

Cleansed using a water-soak and drying procedure BS EN 1021-1:2014 Annex D, and then the sample was conditioned at least 72 h in indoor ambient conditions and 24 h in an atmosphere having a temperature of 23±2°C and a relative humidity of 50±5%.

At time of testing: Temperature between 10°C ~ 30°C and relative humidity between 15% ~ 80%.

Test Results:

The following test results relate only to the ignitability of the sample or combination of materials under the particular condition of test; they are not intended as a means of assessing the full potential fire hazard of the materials or products in use.

Clause 3.1 Progressive smouldering ignition	1 st	2 nd
For the purpose of this European Standard, all the following types of behaviour are considered to be progressive smouldering ignitions		
a) Any test assembly that displays escalating combustion behaviour so that it is unsafe to continue the test and active extinction is necessary;	No	No
b) Any test assembly that smoulders until it is largely consumed within the test duration;	No	No
c) Any test assembly that smoulders to the extremities of the specimen, viz. upper or lower margins, either side or to its full thickness, within the duration of the test;	No	No
d) Whether any test assembly that smoulders after one hour from the application of the ignition source;	No	No
e) Any test assembly that, on final examination shows evidence of progressive smouldering.	No	No
Clause 3.2 Flaming ignition	1 st	2 nd
A flaming ignition is considered to be the occurrence of any flames initiated by a smouldering source	No	No
Clause 9.3 Final examination: Cases of progressive smouldering ignition undetected from the outside have reported. Immediately after completion of the test programme on the assembly, dismantle it and examine it internally for progressive smouldering ignition, if this is found, extinguish the test assembly, and record an ignition and complete the test report, for safety reason ensure that all smouldering has ceased before the rig is left unattended.	NO	

To be continued...



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com

Test Details:

Cigarette test			
Specimen No.	1 st	2 nd	
Progressive smouldering (PS) or Flaming (F)	NO	NO	
Duration of	Ignition source (min, sec)	23min16s	22min47s
	Flames (min, sec)	0s	0s
	Smoke (min, sec)	23min27s	22min56s
Final examination of progressive smouldering (9.3)	No	No	
Comments & observations	--	--	
Test result	Non-ignition	Non-ignition	

Overall result: [] Non-ignition; [] Smouldering ignition; [] Flaming ignition.

2. Test conducted: EN 1021-2:2014 Furniture – Assessment of the ignitability of upholstered furniture Part 2: Ignition source match flame equivalent.

Conditioning:

Prior to testing:

Cleansed using a water-soak and drying procedure BS EN 1021-2:2014 Annex D, and then the sample was conditioned at least 72 h in indoor ambient conditions and 24 h in an atmosphere having a temperature of 23±2°C and a relative humidity of 50±5%.

At time of testing: Temperature between 10°C ~ 30°C and relative humidity between 15% ~ 80%.

Test Results:

The following test results relate only to the ignitability of the sample or combination of materials under the particular condition of test; they are not intended as a means of assessing the full potential fire hazard of the materials or products in use.

Clause 3.1 Progressive smouldering ignition	1 st	2 nd	3 rd
For the purpose of this European Standard, all the following types of behaviour are considered to be progressive smouldering ignitions			
a) Any test assembly that displays escalating combustion behaviour so that it is unsafe to continue the test and active extinction is necessary;	NO	NO	NO
b) Any test assembly that smoulders until it is largely consumed within the test duration;	NO	NO	NO

To be continued...



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com

c) Any test assembly that smoulders to the extremities of the specimen, viz. upper or lower margins, either side or to its full thickness, within the duration of the test;	NO	NO	NO
d) Any test assembly that smoulders after one hour from the application of the ignition source;	NO	NO	NO
e) Any test assembly that, on final examination shows evidence of progressive smouldering.	NO	NO	NO

Clause 3.2 Flaming ignition	1 st	2 nd	3 rd
For the purpose of this European Standard, all the following types of behaviour are considered to be flaming ignitions			
a) Any test assembly that displays escalating combustion behavior so that it is unsafe to continue the test and active extinction is necessary;	NO	NO	NO
b) Any test assembly that burns until it is essentially consumed within the test duration;	NO	NO	NO
c) Any test assembly on which any flame front reaches the lower merge, either side or passes through its full thickness within the duration of the test;	NO	NO	NO
d) Any flaming which continues for more than 120 s after removal of the burner tube.	NO	NO	NO

Clause 9.3 Final examination: Cases of progressive smouldering ignition undetected from the outside have reported. Immediately after completion of the test programme on the assembly, dismantle it and examine it internally for progressive smouldering ignition, if this is found, extinguish the test assembly, and record an ignition and complete the test report, for safety reason ensure that all smouldering has ceased before the rig is left unattended.	NO
--	----

Test Details:

Match flame equivalent test				
Specimen No.		1 st	2 nd	3 rd
Progressive smouldering (PS) or Flaming (F)		NO	NO	NO
Duration of	Ignition source (min, sec)	15s	15s	15s
	Flames (min, sec)	0s	0s	0s
	Smoke (min, sec)	10s	8s	10s
Final examination of progressive smouldering (9.3)		NO	NO	NO
Comments & observations		--	--	--
Test result		Non-ignition	Non-ignition	Non-ignition

Overall result: [] Non-ignition; [] Smouldering ignition; [] Flaming ignition.

To be continued...



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com

Test Report

No. AJHL1604003135FB

Date: APR.14, 2016

Page 5 of 5

Photo Appendix:

Details of sample:

1) Foam


Color: Blue

This sample of approximate density of 24.7 kg/m³.

2) PU

Color: Black

This sample of approximate density of 481 g/m².

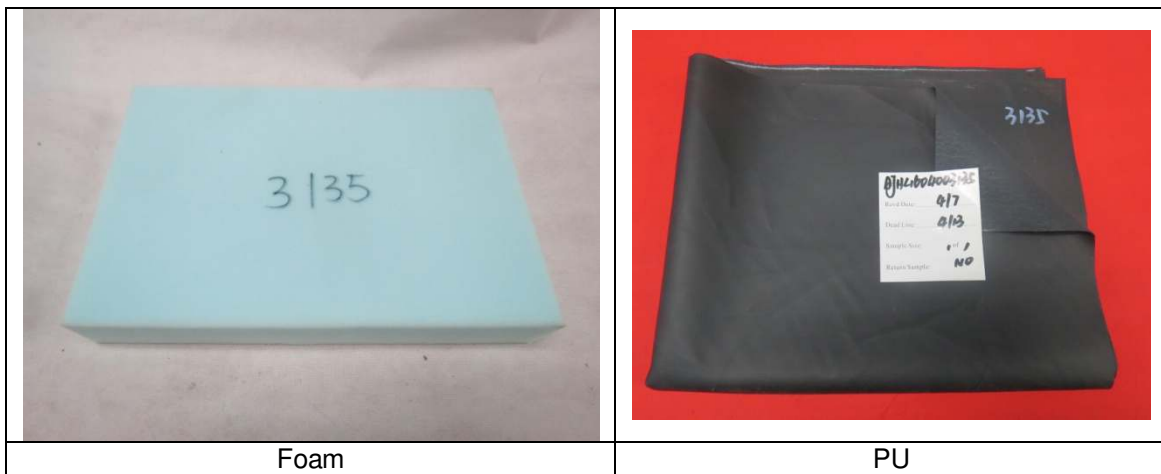

SGS authenticate the photo on original report only

End of Report



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CTI Standards Technical Service Co., Ltd.
Anji Branch

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com